


# STARLED II M

LED recessed gimbal downlight  
 max. 29W(Module) / 32W(System)  
 max. 3500lm(M) / 3000lm(S)  
 CCT=2700K | 3000K | 3250K | 3500K | 4000K | 5000K  
 1100lm / 2000lm / 3000lm / 4000lm luminaire lumen class  
 category

**CRISP WHITE | FASHION - BEST COLOUR + BEST WHITE  
 FRESH MEAT | MEAT+ | FISH | VEGETABLE | FRUITS |  
 GOLD | JEWELRY | ART**

CRI(Ra) > 80 | CRI(Ra)>90 | CRI(Ra)>97  
 MacAdam 2  
 Tilting and turning (359°/90°)  
 5 years guarantee  
 220-240V; 50/60 Hz AC Power supply  
 ON/OFF | 1-10V | PUSH-DIM | DALI | CASAMBI | BLL  
 White/Black  
 1,2kg

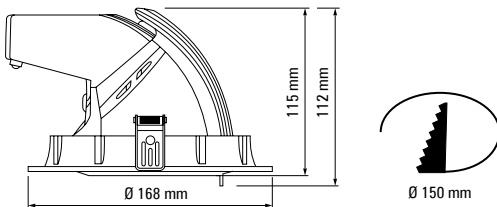

Type	CRI + CCT *	Reflector	Dimming	Colour
EDC 181 1/13 LED	827	15°	ON/OFF	WH (WHITE)
EDC 181 1/17 LED	830	24°	DALI	BL (BLACK)
EDC 181 1/21 LED	840	36°	CASAMBI	
EDC 181 1/25 LED	927		BLL	
EDC 181 1/29 LED	930		TUNABLE WHITE	
	930 BBBL			
	930 BRILIANT VIVID			
	935			
	940			

\* - other versions like CRISP WHITE, PREMIUM WHITE, CLEAR WHITE, MEAT etc. also possible  
 Order example: EDC 181 1/13 LED927 15DEG DALI WHITE

Type	COB Power [W]	Luminaire Power [W]	COB Flux* [lm]	Luminaire Flux* [lm]
EDC 181 1/13 LED	13	15	1830	1556
EDC 181 1/17 LED	17	20	2250	1913
EDC 181 1/21 LED	21	24	2658	2259
EDC 181 1/25 LED	25	28	3052	2594
EDC 181 1/29 LED	29	32	3435	2920

Based on CCT=3000K CRI(Ra)>90



Power, Luminous Flux and CCT depending on customer need; current detail technical data on website [www.sentinel.pl](http://www.sentinel.pl)  
 Power & Luminous flux tolerance +/- 10%. Driverless versions on request.