



## LITTLE BLACK S [ LUMINAIRE ]

Luminaires designed for modern, discreet lighting of architectural spaces.  
 Many versions with different positions of lenses, LED modules and aluminium covers.  
 Low power version: 14W | 1200lm | 1000mm length | luminaire  
 Medium power version: 27W | 2200lm | 1000mm length | luminaire  
 Many different junctions and connectors to create any lighting structures  
 High performance opal diffuser  
 Lens LED inserts  
 Surface mounted or suspended  
 Height-adjustable cord suspension with transparent power supply cable  
 and ceiling base for suspended version

CCT= 3000K | 3500K | 4000K | other on request  
 CRI(Ra) > 80 as standard | CRI(Ra)>90 on request  
 MacAdam 3

5 years guarantee  
 220-240V 50/60 Hz Power supply  
 ON/OFF | DALI | CASAMBI | BLL | TUNABLE WHITE  
 Black  
 ca 3kg | 1000mm

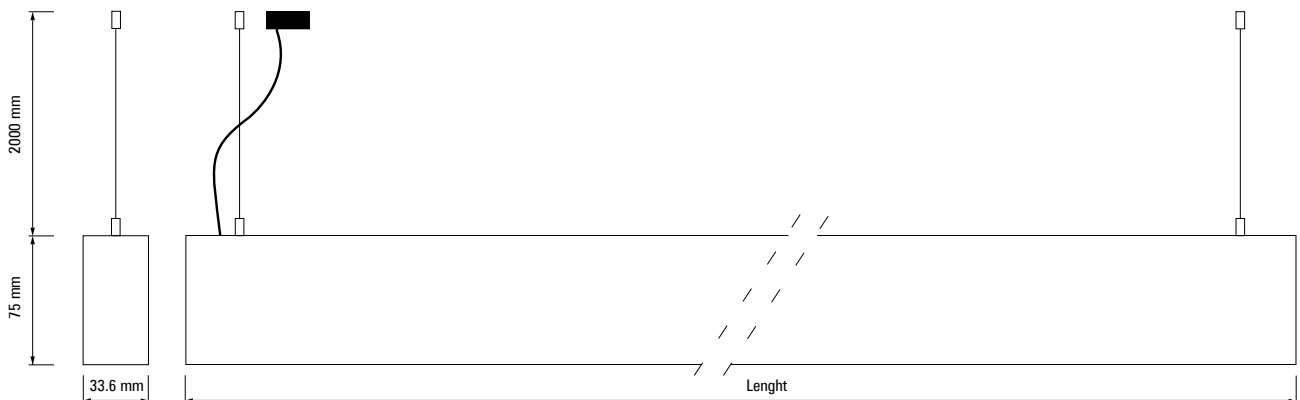


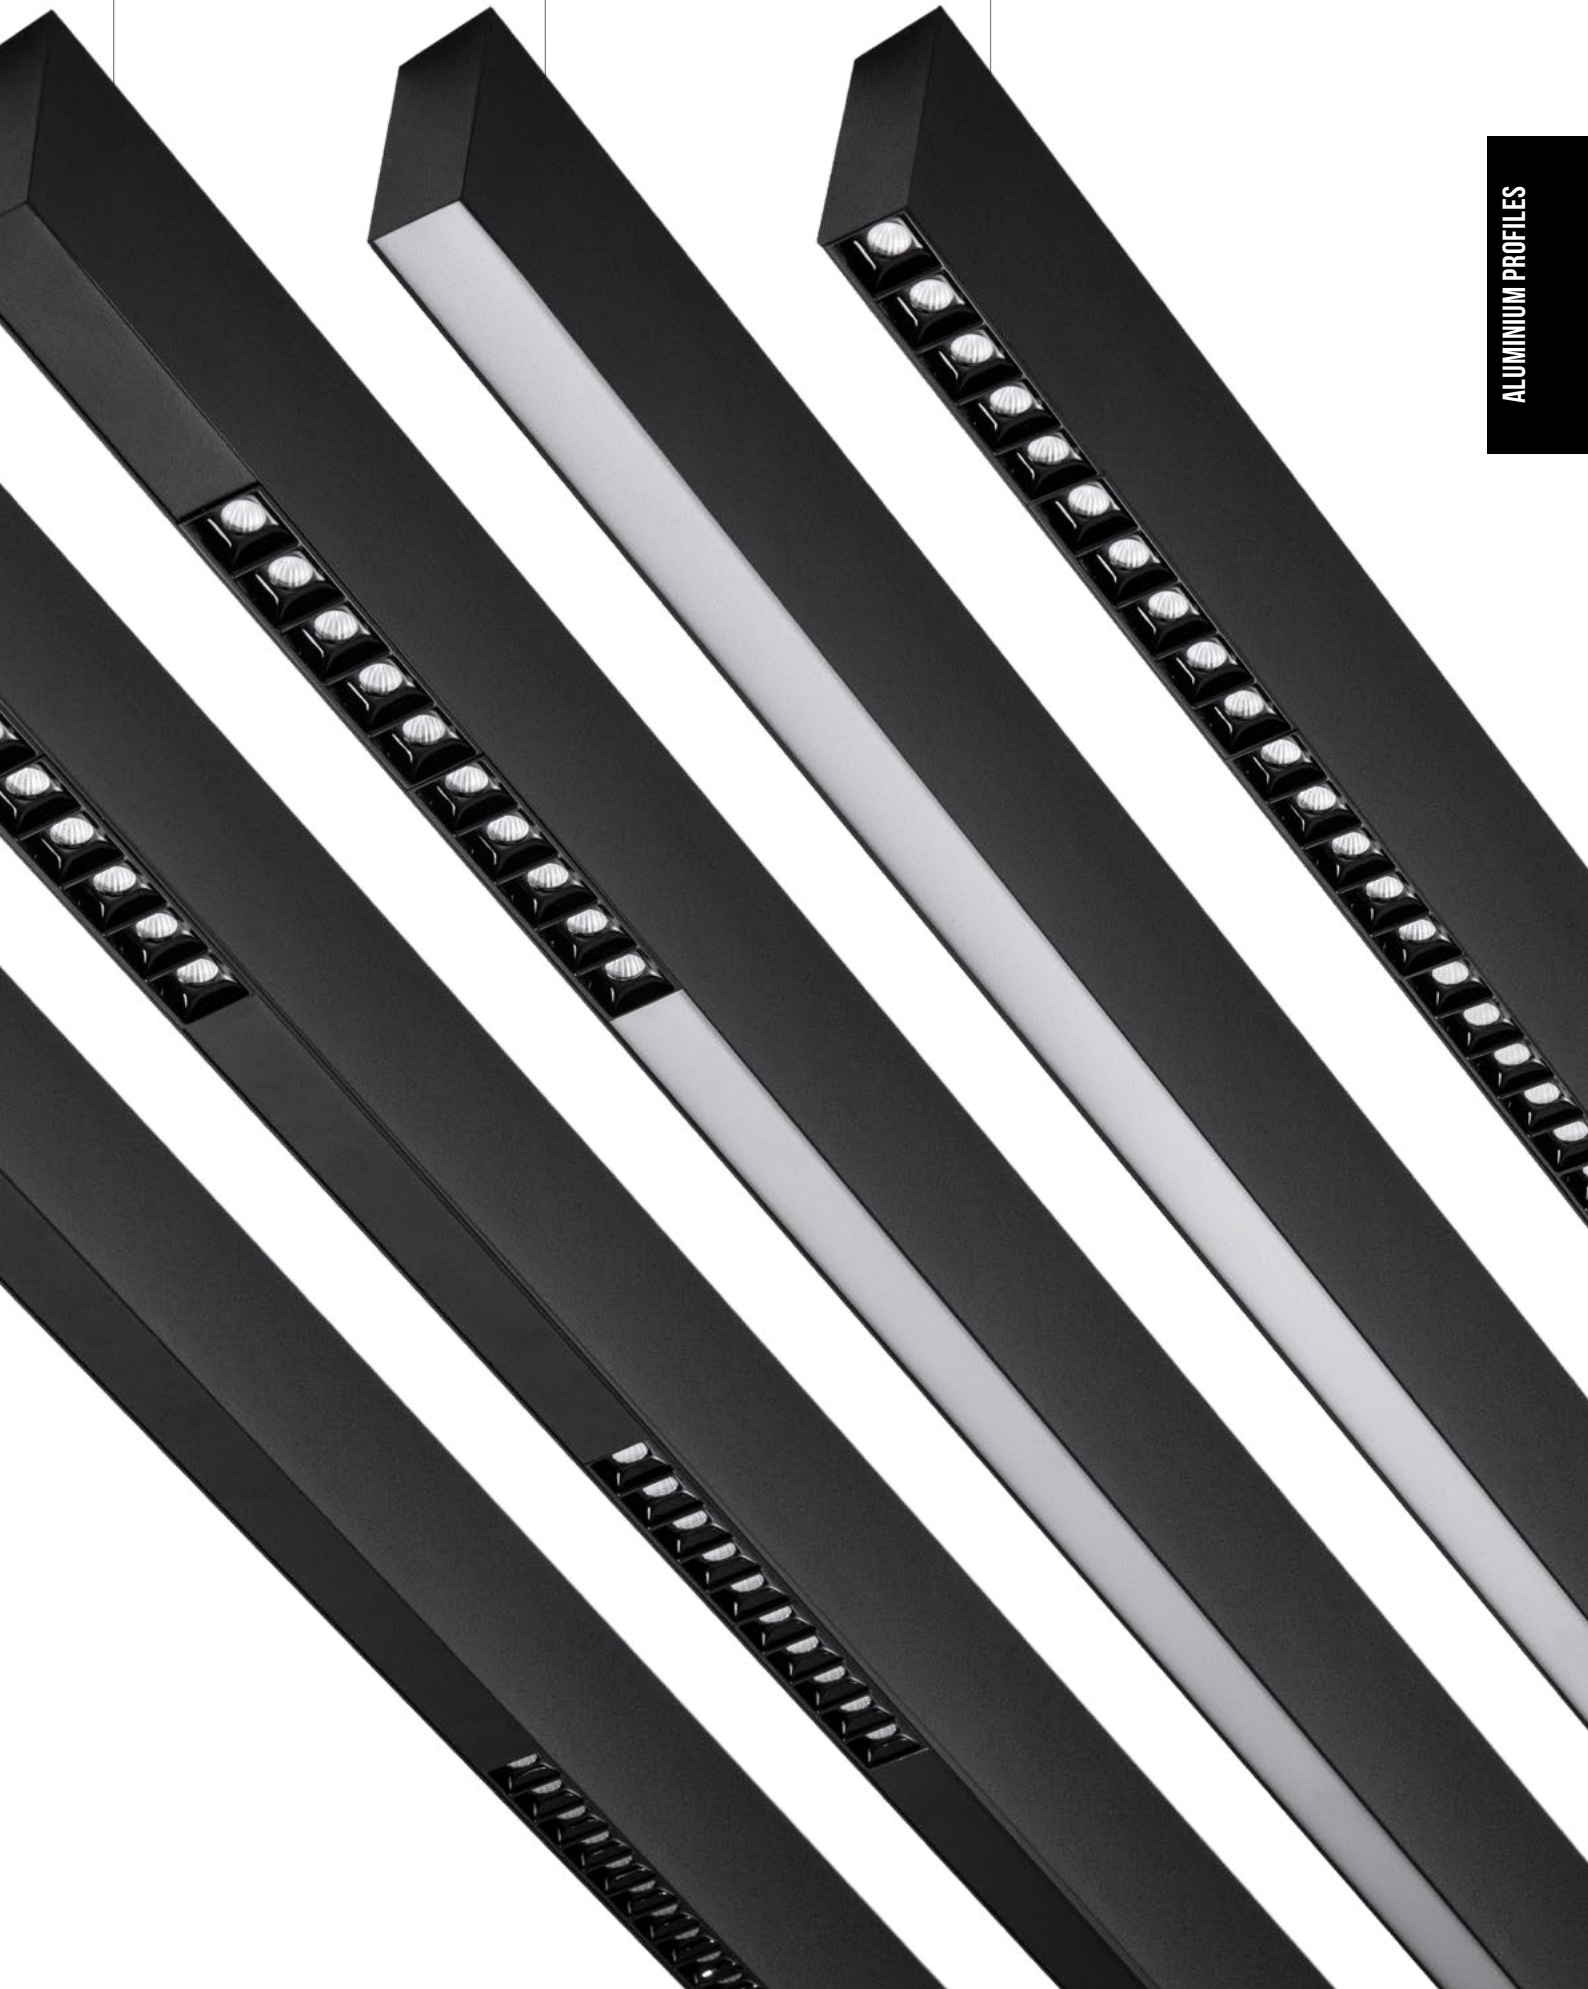


Type	Lenght [mm]	Module Power [W]	CRI + CCT *	Lenses	Dimming	Colour
LTS 703 2/15 2L10 265 1303mm LED	1303	2x15	830	15°	- (ON/OFF)	BL (BLACK)
LTS 703 2/15 2L10 265 1583mm LED	1583	2x15	840	30°	DALI	
LTS 703 2/15 2L10 265 1863mm LED	1863	2x15		45°	CASAMBI	
LTS 703 2/15 2L10 265 2143mm LED	2143	2x15			BLL	
LTS 703 2/15 2L10 265 2423mm LED	2423	2x15			TW (TUNABLE WHITE)	
LTS 703 2/15 2L10 265 2703mm LED	2703	2x15				
LTS 703 2/15 2L10 265 2983mm LED	2983	2x15				



Type	Lenght [mm]	Module Power [W]	CRI + CCT *	Lenses	Dimming	Colour
LTS 703 3/15 3L265 1568mm LED	1568	3x15	830	15°	- (ON/OFF)	BL (BLACK)
LTS 703 3/15 3L265 2128mm LED	2128	3x15	840	30°	DALI	
LTS 703 3/15 3L265 2688mm LED	2688	3x16		45°	CASAMBI	
LTS 703 6/15 L265 2113mm LED	2113	4x15			BLL	
LTS 703 4/15 L265 2923mm LED	2923	6x15			TW (TUNABLE WHITE)	

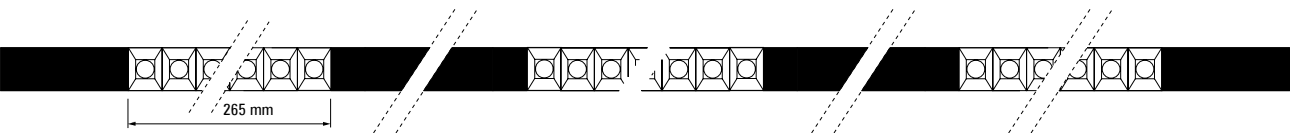



Type	Lenght [mm]	Module Power [W]	CRI + CCT *	Lenses	Dimming	Colour
LTS 703 3/15 3L265 799mm LED	799	3x15	830	15°	- (ON/OFF)	BL (BLACK)
LTS 703 4/15 4L265 1064mm LED	1064	4x15	840	30°	DALI	
LTS 703 5/15 5L265 1329mm LED	1329	5x15		45°	CASAMBI	
LTS 703 6/15 6L265 1594mm LED	1594	6x15			BLL	
LTS 703 7/15 7L265 1859mm LED	1859	7x15			TW (TUNABLE WHITE)	
LTS 703 8/15 8L265 2124mm LED	2124	8x15				
LTS 703 9/15 9L265 2389mm LED	2389	9x15				
LTS 703 10/15 10L265 2654mm LED	2654	10x15				
LTS 703 11/15 11L265 2919mm LED	2919	11x15				

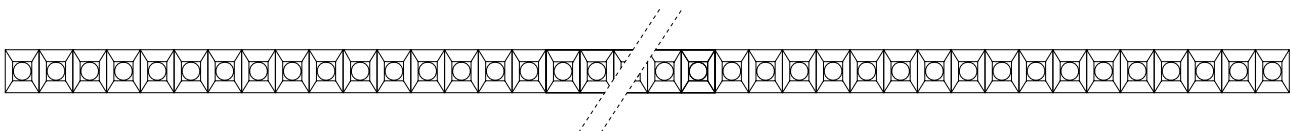

Type	Lenght [mm]	Module Power [W]	CRI + CCT *	Lenses	Dimming	Colour
LTS 703 1/*** + 2/15 2L265 1023mm LED	1023	1x*** + 2x15	830	15°	-(ON/OFF)	BL (BLACK)
LTS 703 1/*** + 2/15 2L265 1303mm LED	1303	1x*** + 2x15	840	30°	DALI	
LTS 703 1/*** + 2/15 2L265 1583mm LED	1583	1x*** + 2x15		45°	CASAMBI	
LTS 703 1/*** + 2/15 2L265 1863mm LED	1863	1x*** + 2x15			BLL	
LTS 703 1/*** + 2/15 2L265 2143mm LED	2143	1x*** + 2x15			TW (TUNABLE WHITE)	
LTS 703 1/*** + 2/15 2L265 2423mm LED	2423	1x*** + 2x15				
LTS 703 1/*** + 2/15 2L265 2703mm LED	2703	1x*** + 2x15				
LTS 703 1/*** + 2/15 2L265 2983mm LED	2983	1x*** + 2x15				
LTS 703 1/*** 773mm LED	773	1x***				
LTS 703 1/*** 1053mm LED	1053	1x***				
LTS 703 1/*** 1333mm LED	1333	1x***				
LTS 703 1/*** 1613mm LED	1613	1x***				
LTS 703 1/*** 1893mm LED	1893	1x***				
LTS 703 1/*** 2173mm LED	2173	1x***				
LTS 703 1/*** 2453mm LED	2453	1x***				
LTS 703 1/*** 2733mm LED	2733	1x***				
LTS 703 1/*** 573mm LED	573	1x***				
LTS 703 1/*** 853mm LED	853	1x***				
LTS 703 1/*** 1133mm LED	1133	1x***				
LTS 703 1/*** 1413mm LED	1413	1x***				
LTS 703 1/*** 1693mm LED	1693	1x***				
LTS 703 1/*** 1973mm LED	1973	1x***				
LTS 703 1/*** 2253mm LED	2253	1x***				
LTS 703 1/*** 2533mm LED	2533	1x***				
LTS 703 1/*** 2813mm LED	2813	1x***				

\*\*\* - low/medium power linear module with opal diffuser according to request

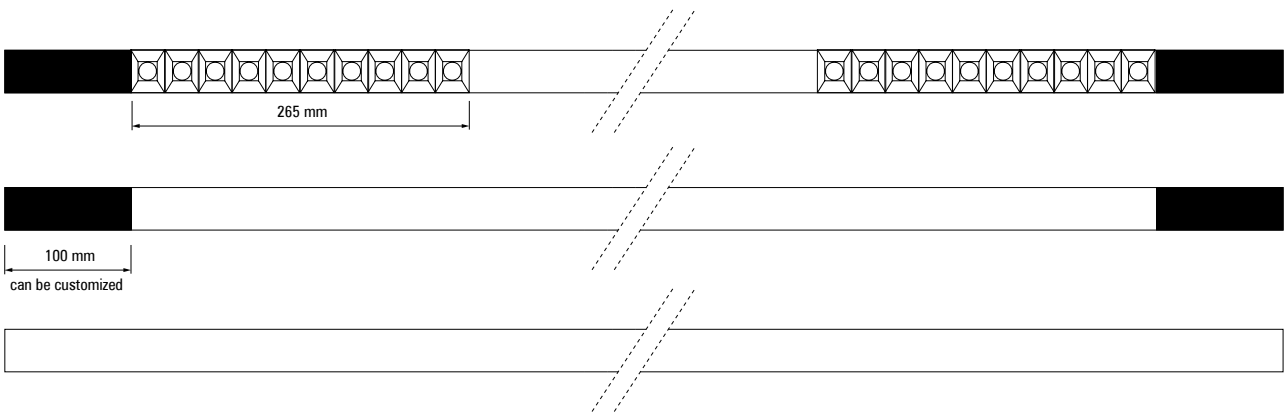

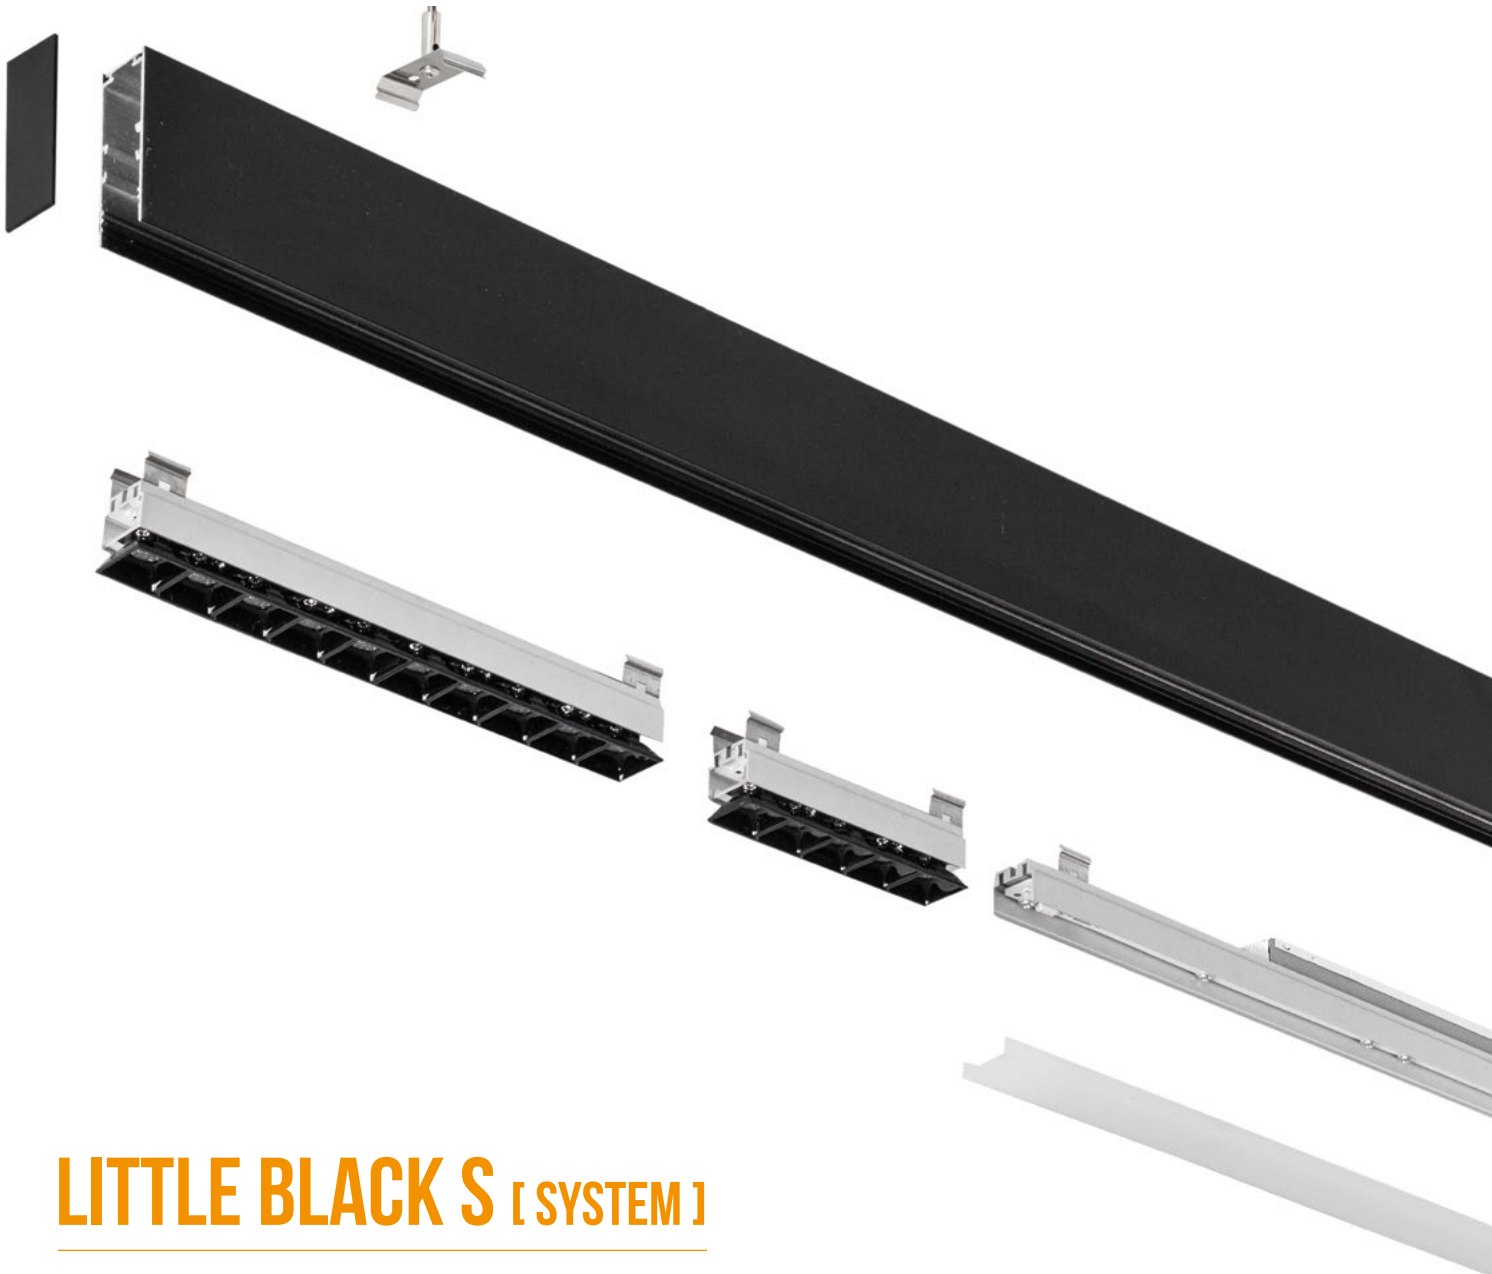

## LITTLE BLACK S [ SYSTEM ]

Modular LED aluminium profile system

Designed for continuous lighting systems with different shapes and individual luminaires

Low power version: 14W | 1200lm | 1000mm length | luminaire

Medium power version: 27W | 2200lm | 1000mm length | luminaire

Many different junctions and connectors to create any lighting structures

High performance opal diffuser

Lens LED inserts

Surface mounted or suspended

Height-adjustable cord suspension with transparent power supply cable  
and ceiling base for suspended version

CCT= 3000K | 3500K | 4000K | other on request

CRI(Ra) > 80 as standard | CRI(Ra)>90 on request

MacAdam 3


5 years guarantee



220-240V 50/60 Hz Power supply

ON/OFF | DALI | CASAMBI | BLL | TUNABLE WHITE



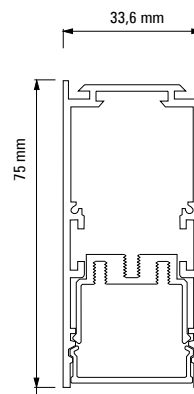




Black

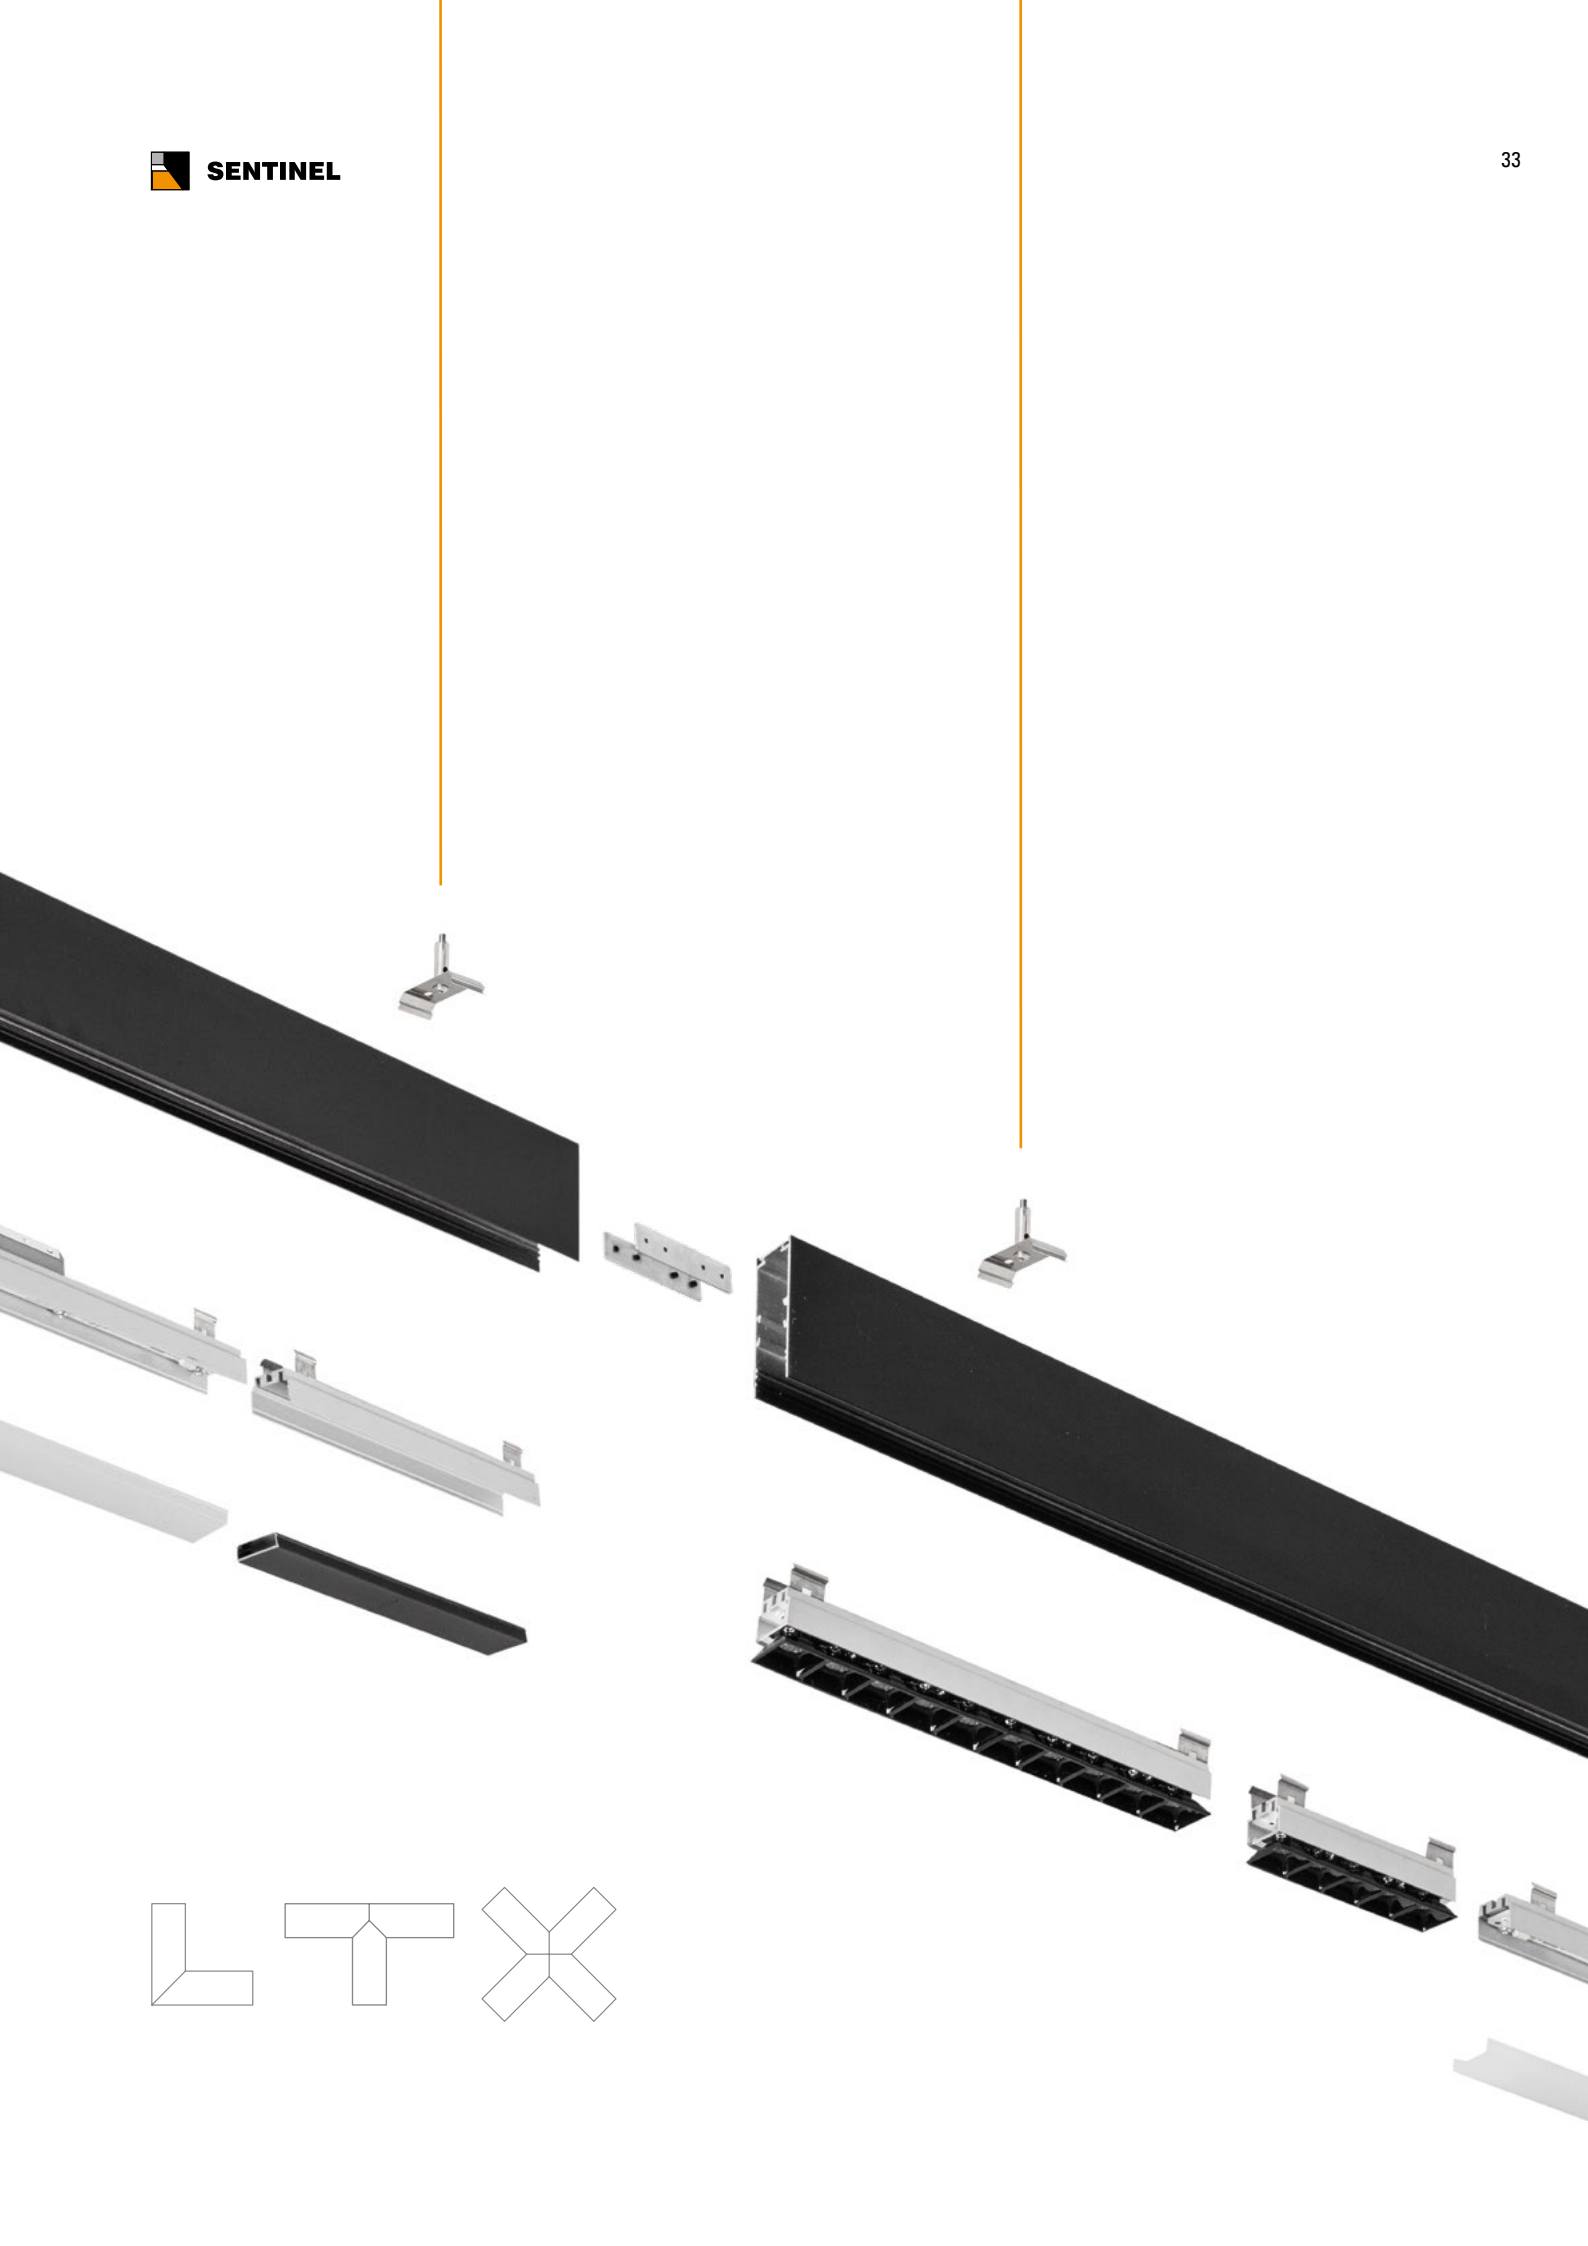ca 3kg | 1000mm











# LITTLE BLACK S [ SYSTEM ]

Type	Length [mm]	CRI+CCT *	Reflector	Dimming	Colour	
	<b>Aluminium empty profile</b>					
	LTS 703 EP 1000 [cut to required length]	1000			BL (BLACK)	
	LTS 703 EP 2000 [cut to required length]	2000				
	LTS 703 EP 3000 [cut to required length]	3000				
	<b>LED linear inserts</b>					
	<b>Low power: 14W   1200lm   1000mm</b>					
	LTS 703 1/7 LED LI	565	830		ON/OFF DALI CASAMBI BLL TW (TUNABLE WHITE)	
	LTS 703 1/10 LED LI	845	835			
	LTS 703 1/14 LED LI	1125	840			
	LTS 703 1/17 LED LI	1405				
	<b>Medium power 27W   2200lm   1000mm</b>					
	LTS 703 1/14 LED LI	565	830			
	LTS 703 1/20 LED LI	845	835			
	LTS 703 1/27 LED LI	1125	840			
LTS 703 1/33 LED LI	1405					
	<b>LED module with lens</b>					
	LTS 703 5/1,5 LED LI	132.5	830	15°	ON/OFF	
	LTS 703 10/1,5 LED LI	265	840	30° 45°	DALI CASAMBI BLL TW (TUNABLE WHITE)	
	<b>Opal Cover</b>					
	LTS 703 PM 1000 [cut to required length]	1000				
LTS 703 PM 2000 [cut to required length]	2000					
	<b>Aluminium Blind Cover</b>					
	LTS 703 BC 1000 [cut to required length]	1000			BL (BLACK)	
LTS 703 BC 2000 [cut to required length]	2000					
	<b>L Junction 90DEG horizontal</b>					
LTS 703 LJH				BL (BLACK)		
	<b>L Junction 90DEG vertical for wall-ceiling connection</b>					
LTS 703 LJV				BL (BLACK)		



Type		Lenght [mm]	CRI+CCT *	Dimming	Colour
	<b>T Junction</b> LTS 703 TJ ■				■ BL (BLACK)
	<b>X Junction</b> LTS 703 XJ ■				■ BL (BLACK)
	<b>Invisible line connectors 180DEG (pair)</b> LTS 703 ILC				GALVANIZED STEEL
	<b>Invisible line connectors for any angle connections (pair)</b> LTS 703 ILCA				GALVANIZED STEEL
	<b>End Caps</b> LTS 703 EC (pair) ■				■ BL (BLACK)
	<b>Power supply</b> LTS 703 PS 3x0,75mm <sup>2</sup> 2000 LTS 703 PS 5x0,75mm <sup>2</sup> 2000 other execution and lenghts on request	2000 2000			■ BL (BLACK)
	<b>Ceiling brackets</b> LTS 703 CB (pair)				STAINLESS STEEL
	<b>Suspension Wire Kit</b> LTS 703 SWK 2000 other lenghts on request	2000			STAINLESS STEEL







