


# LUMICA XXL ROUND

LED recessed downlight  
 max. 28W (Module) / 32W (System)  
 max. 3120lm (M) / 2652lm (S)  
 CCT= 3000K | 4000K | 5000K  
 1100lm / 2000lm / 3000lm luminaire lumen class category

CRI(Ra) > 80  
 MacAdam 3  
 5 years guarantee  
 220-240V; 50/60 Hz AC Power supply  
 ON/OFF | DALI  
 White/Black  
 1,1kg

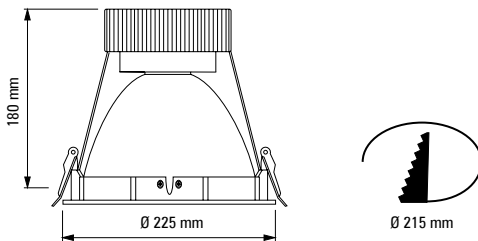

Type	CRI + CCT *	Reflector	Dimming	Colour
EOS 215 1/19	830	51°	ON/OFF	WH (WHITE)
EOS 215 1/28	840		DALI	BL (BLACK)
EOS 215 1/44				

Order example: EOS 215 1/28 LED830 51DEG DALI WHITE

Type	COB Power [W]	Luminaire Power [W]	COB Flux* [lm]	Luminaire Flux* [lm]
EOS 215 1/19	19	22	2550	2170
EOS 215 1/28	26	30	3370	2870
EOS 215 1/44	44	50	5050	4300

Based on CCT=3000K CRI(Ra)>80



Power, Luminous Flux and CCT depending on customer need; current detail technical data on website [www.sentinel.pl](http://www.sentinel.pl)  
 Power & Luminous flux tolerance +/- 10%. Driverless versions on request.