

LINEA L [LUMINAIRE]

Modular LED aluminium profile system

Designed for continuous lighting systems with different shapes and individual luminaires

Medium power version: 27W | 2200lm | 1000mm length | luminaire

High power version: 43W | 3750lm | 1000mm length | luminaire

Many different junctions and connectors to create any lighting structures

High performance opal diffuser

Surface mounted or suspended

Height-adjustable cord suspension with transparent power supply cable and ceiling base for suspended version

CCT= 3000K | 3500K | 4000K | other on request
CRI(Ra) > 80 as standard | CRI(Ra)>90 on request
MacAdam 3


5 years guarantee

220-240V 50/60 Hz Power supply

ON/OFF | DALI | CASAMBI | BLL | TUNABLE WHITE

Anodized/White/Black other colours on request

ca. 3,5kg | 1000mm

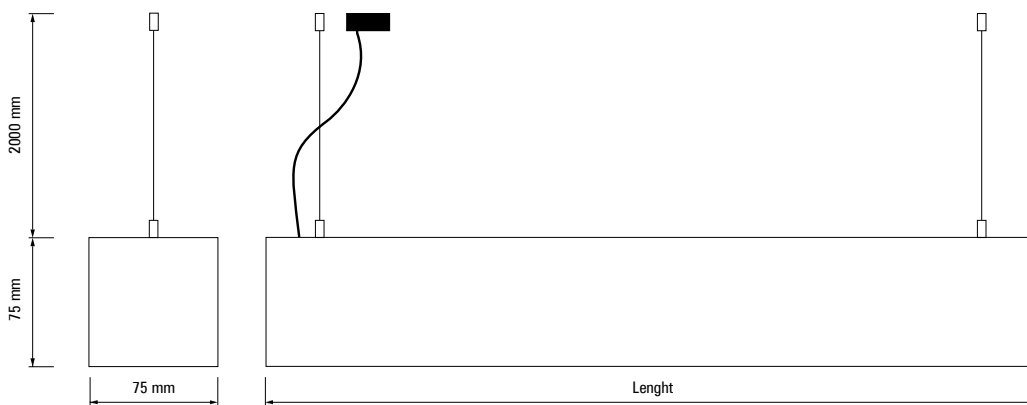

| Type | CRI + CCT * | Reflector | Dimming | Colour |
|---|-------------|-----------|--------------------|-------------------------|
| Medium power 27W 2200lm 1000mm | ■ | ■ | ■ | ■ |
| LTS 309 1/14 LED | 830 | PM | - (ON/OFF) | AA (ANODIZED ALUMINIUM) |
| LTS 309 1/20 LED | 835 | | DALI | WH (WHITE) |
| LTS 309 1/27 LED | 840 | | CASAMBI | BL (BLACK) |
| LTS 309 1/33 LED | | | BLL | |
| LTS 309 1/40 LED | | | TUNABLE WHITE | |
| LTS 309 1/47 LED | | | | |
| LTS 309 1/53 LED | | | | |
| LTS 309 1/60 LED | | | | |
| LTS 309 1/66 LED | | | | |
| High power 43W 3750lm 1000mm | ■ | ■ | ■ | ■ |
| LTS 309 1/22 LED | 830 | PM | - (ON/OFF) | AA (ANODIZED ALUMINIUM) |
| LTS 309 1/33 LED | 835 | | DALI | WH (WHITE) |
| LTS 309 1/43 LED | 840 | | CASAMBI | BL (BLACK) |
| LTS 309 1/54 LED | | | BLL | |
| LTS 309 1/65 LED | | | TW (TUNABLE WHITE) | |
| LTS 309 1/75 LED | | | | |
| LTS 309 1/86 LED | | | | |
| LTS 309 1/97 LED | | | | |
| LTS 309 1/107 LED | | | | |

* - other versions also possible
 Order example: LTS 309 1/23 LED 830 ON/OFF WHITE

| Type | Lenght [mm] | Module Power [W] | Luminaire Power [W] | Module Flux* [lm] | Luminaire Flux* [lm] |
|---|-------------|------------------|---------------------|-------------------|----------------------|
| Medium power 27W 2200lm 1000mm | | | | | |
| LTS 309 1/14 LED LI | 580 | 14 | 16 | 2240 | 1230 |
| LTS 309 1/20 LED LI | 860 | 20 | 23 | 3360 | 1850 |
| LTS 309 1/27 LED LI | 1140 | 27 | 31 | 4480 | 2460 |
| LTS 309 1/33 LED LI | 1420 | 33 | 38 | 5600 | 3080 |
| LTS 309 1/40 LED LI | 1700 | 40 | 46 | 6720 | 3700 |
| LTS 309 1/47 LED LI | 1980 | 47 | 54 | 7840 | 4310 |
| LTS 309 1/53 LED LI | 2260 | 53 | 61 | 8960 | 4930 |
| LTS 309 1/60 LED LI | 2540 | 60 | 69 | 10080 | 5540 |
| LTS 309 1/66 LED LI | 2820 | 66 | 75 | 11200 | 6160 |
| High power 43W 3750lm 1000mm | | | | | |
| LTS 309 1/22 LED LI | 580 | 22 | 25 | 3880 | 2130 |
| LTS 309 1/33 LED LI | 860 | 33 | 38 | 5820 | 3200 |
| LTS 309 1/43 LED LI | 1140 | 43 | 49 | 7760 | 4270 |
| LTS 309 1/54 LED LI | 1420 | 54 | 62 | 9700 | 5340 |
| LTS 309 1/65 LED LI | 1700 | 65 | 74 | 11640 | 6400 |
| LTS 309 1/75 LED LI | 1980 | 75 | 86 | 13580 | 7470 |
| LTS 309 1/86 LED LI | 2260 | 86 | 98 | 15520 | 8540 |
| LTS 309 1/97 LED LI | 2540 | 97 | 111 | 17460 | 9600 |
| LTS 309 1/107 LED LI | 2820 | 107 | 122 | 19400 | 10670 |

Based on CCT=3000K CRI(Ra)>80



Power, Luminous Flux and CCT depending on customer need; current detail technical data on website www.sentinel.pl
 Power & Luminous flux tolerance +/- 10%. Driverless versions on request.