

## LINEA M [ LUMINAIRE ]

Modular LED aluminium profile system

Designed for continuous lighting systems with different shapes and individual luminaires

Low power version: 14W | 1200lm | 1000mm length | luminaire

Medium power version: 27W | 2200lm | 1000mm length | luminaire

Many different junctions and connectors to create any lighting structures

High performance opal diffuser

Surface mounted or suspended

Height-adjustable cord suspension with transparent power supply cable and ceiling base for suspended version

CCT= 3000K | 3500K | 4000K | other on request

CRI(Ra) > 80 as standard | CRI(Ra)>90 on request

MacAdam 3


5 years guarantee

220-240V 50/60 Hz Power supply

ON/OFF | DALI | CASAMBI | BLL | TUNABLE WHITE

Anodized/White/Black other colours on request

ca. 3,0kg | 1000mm

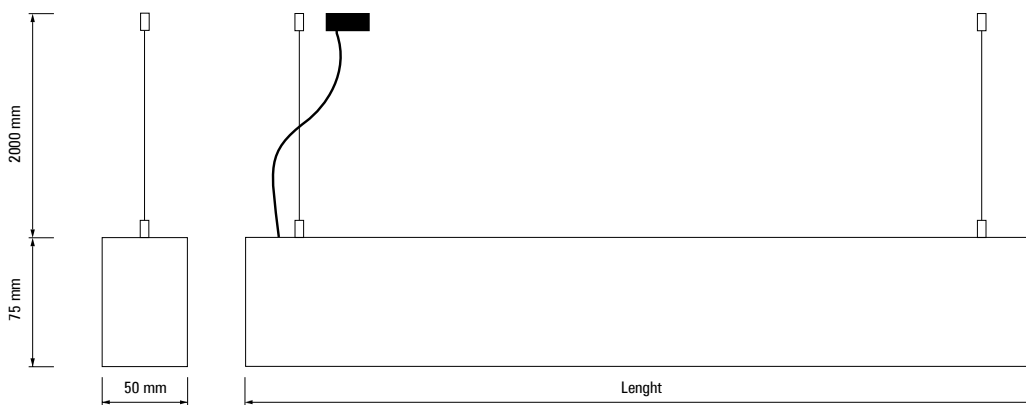

Type	CRI + CCT *	Reflector	Dimming	Colour
<b>Low power: 14W   1200lm   1000mm</b>	■	■	■	■
LTS 307 1/7 LED	830	PM	- (ON/OFF)	AA (ANODIZED ALUMINIUM)
LTS 307 1/10 LED	835		DALI	WH (WHITE)
LTS 307 1/14 LED	840		CASAMBI	BL (BLACK)
LTS 307 1/17 LED			BLL	
LTS 307 1/20 LED			TW (TUNABLE WHITE)	
LTS 307 1/24 LED				
LTS 307 1/27 LED				
LTS 307 1/30 LED				
LTS 307 1/33 LED				
<b>Medium power 27W   2200lm   1000mm</b>	■	■	■	■
LTS 307 1/14 LED	830	PM	- (ON/OFF)	AA (ANODIZED ALUMINIUM)
LTS 307 1/20 LED	835		DALI	WH (WHITE)
LTS 307 1/27 LED	840		CASAMBI	BL (BLACK)
LTS 307 1/33 LED			BLL	
LTS 307 1/40 LED			TW (TUNABLE WHITE)	
LTS 307 1/47 LED				
LTS 307 1/53 LED				
LTS 307 1/60 LED				
LTS 307 1/66 LED				

\* - other versions also possible  
 Order example: LTS 307 1/33 LED 830 ON/OFF WHITE

Type	Lenght [mm]	Module Power [W]	Luminaire Power [W]	Module Flux* [lm]	Luminaire Flux* [lm]
<b>Low power: 14W   1200lm   1000mm</b>					
LTS 307 1/7 LED	580	7	8	1220	
LTS 307 1/10 LED	860	10	12	1830	
LTS 307 1/14 LED	1140	14	16	2440	
LTS 307 1/17 LED	1420	17	20	3050	
LTS 307 1/20 LED	1700	20	23	3660	
LTS 307 1/24 LED	1980	24	28	4270	
LTS 307 1/27 LED	2260	27	31	4880	
LTS 307 1/30 LED	2540	30	35	5490	
LTS 307 1/33 LED	2820	33	38	6100	
<b>Medium power: 27W   2200lm   1000mm</b>					
LTS 307 1/14 LED	580	14	16	2240	
LTS 307 1/20 LED	860	20	23	3360	
LTS 307 1/27 LED	1140	27	31	4480	
LTS 307 1/33 LED	1420	33	38	5600	
LTS 307 1/40 LED	1700	40	46	6720	
LTS 307 1/47 LED	1980	47	54	7840	
LTS 307 1/53 LED	2260	53	61	8960	
LTS 307 1/60 LED	2540	60	69	10080	
LTS 307 1/66 LED	2820	66	75	11200	

Based on CCT=3000K CRI(Ra)>90



Power, Luminous Flux and CCT depending on customer need; current detail technical data on website [www.sentinel.pl](http://www.sentinel.pl)  
 Power & Luminous flux tolerance +/- 10%. Driverless versions on request.