


## LOW VOLTAGE SYSTEMS

Modular low voltage profile light system with 26,2mm width. Various aluminium profiles and light inserts give possibility creating countless combinations. Surface mounted, suspended or recessed versions. Light inserts can be installed and moved without tools.






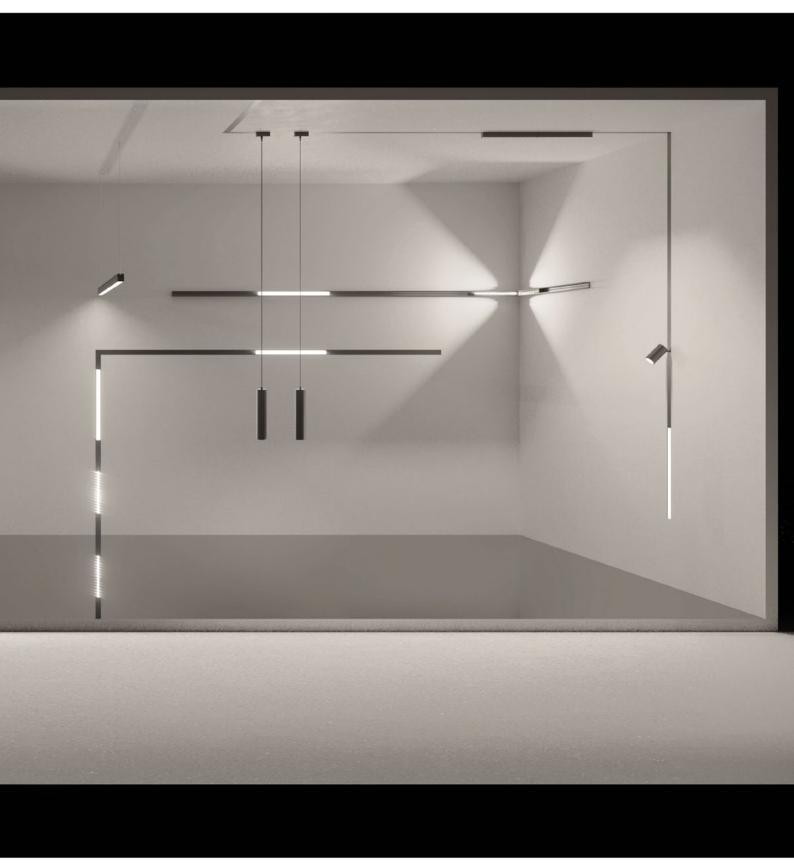






## Aluminium profiles







LTS 509 Low aluminum profile for surface and ceiling / suspension mounting

LTS 510 High aluminum profile for surface and ceiling / suspension mounting


## **Light inserts**

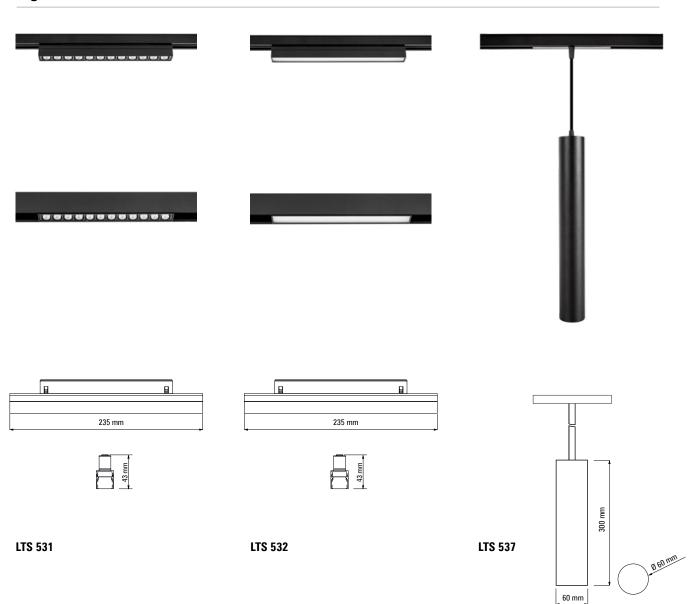






LTS 511 Low aluminum profile for recessed mounting





LTS 512 High aluminum profile for recessed mounting

























Type  Light inserts		Power [W]	Lenght [mm]	CRI+CCT	Reflector [DEG]	Lumen output [lm]	Dimming	Colour
							ON/OFF	BL (BLACK)
	LTS 531 8/1 930 24DEG PM	8	235	930	24	500	DALI	DE (DENON)
							CASAMBI	
							ON/OFF	BL (BLACK)
	LTS 532 8/1 930 120DEG PM	8	235	930	120	500	DALI	
							CASAMBI	
							ON/OFF DALI CASAMBI	BL (BLACK)
-	LTS 533 1/3 20EG 930	3	44	930	24	220		52 (52 (51)
							ON/OFF	BL (BLACK)
	LTS 534 1/10 24DEG 930	10	110	930	24	800	DALI	(,
							CASAMBI	
							ON/OFF DALI CASAMBI	BL (BLACK)
	LTS 535 5/2 30DEG 930 ■■	10	245	930	24	700		
							ON/OFF	BL (BLACK)
	LTS 536 10/2 30DEG 930	20	245	930	24	1400	DALI CASAMBI	



Туре		Power [W]	Lenght [mm]	CRI+CCT	Reflector [DEG]	Lumen output [lm]	Dimming	Colour
Light inserts								
							ON/OFF	BL (BLACK)
	LTS 537 1/10 24DEG 930 PM	10	300	930	24	700	DALI CASAMBI	

Туре		Lenght [mm]	Colour
Aluminium profiles	Low aluminum profile for surface and ceiling / suspension mounting  LTS 509 EP 1000 [cut to required length]   LTS 509 EP 2000 [cut to required length]	1000 2000	WH (WHITE) BL (BLACK)
	High aluminum profile for surface and ceiling / suspension mounting LTS 510 EP 1000 [cut to required length]  LTS 510 EP 2000 [cut to required length]	1000 2000	WH (WHITE) BL (BLACK)
	Low aluminum profile for recessed mounting  LTS 511 EP 1000 (cut to required length)  LTS 511 EP 2000 (cut to required length)	1000 2000	WH (WHITE) BL (BLACK)
	High aluminum profile for recessed mounting  LTS 512 EP 1000 [cut to required length]   LTS 512 EP 2000 [cut to required length]	1000 2000	WH (WHITE) BL (BLACK)
	Plastic Blind Cover for all types of profiles (option) LTS 500 PBC ■	1000	WH (WHITE) BL (BLACK)

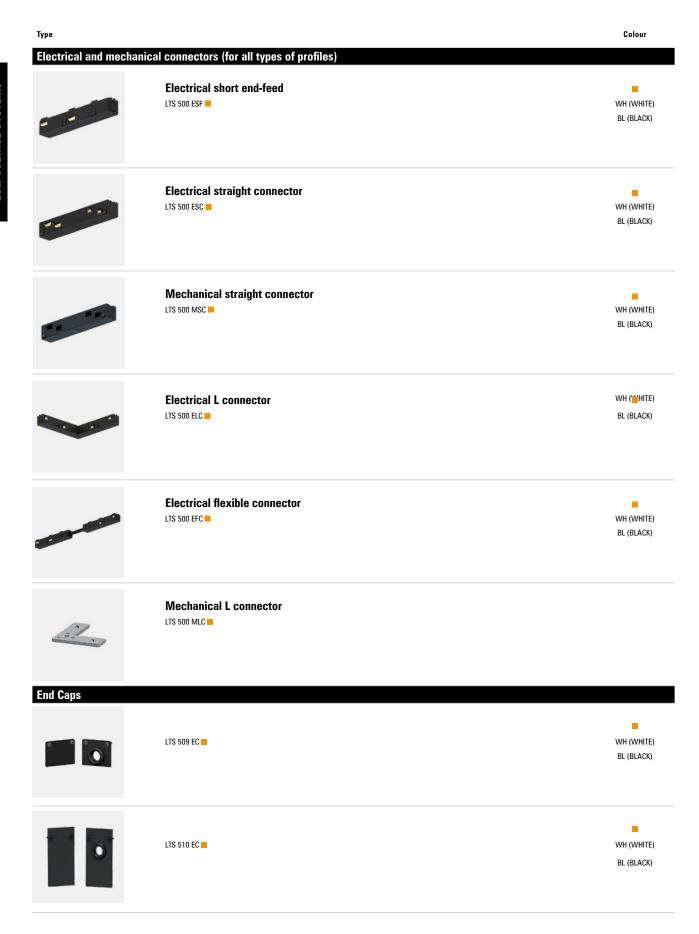



Туре Colour Power supply 230V/48W Mounted above the recessed ceiling LTS 500 PS 48VDC 75W LTS 500 PS 48VDC 150W Mounted on ceiling LTS 500 PS 48VDC 100W CM WH (WHITE) BL (BLACK) Mounted on ceiling for hanging systems with 2000mm cable LTS 500 PS 48VDC 100W CSM 2000 WH (WHITE) BL (BLACK) L Junction 90DEG horizontal for LTS 510 LTS 510 HLJ WH (WHITE) BL (BLACK) Ceiling & suspension brackets LTS 509 SSB (only for LTS 509 profile) WH (WHITE) BL (BLACK) WH (WHITE) LTS 509 SLB (only for LTS 509 profile) BL (BLACK) LTS 510 SSB (only for LTS 510 profile) LTS 510 SLB (only for LTS 510 profile)

